



Elettromandrino/electrospindle
QE-1F 7.5/6 24 63F NC CB DV
Codice/Code:
29L0385638C

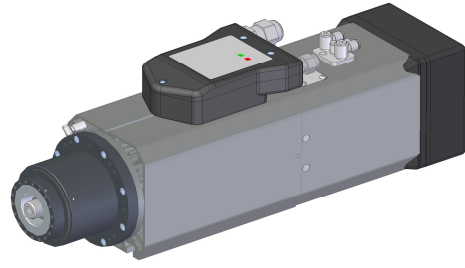

Prestazioni - Performancies

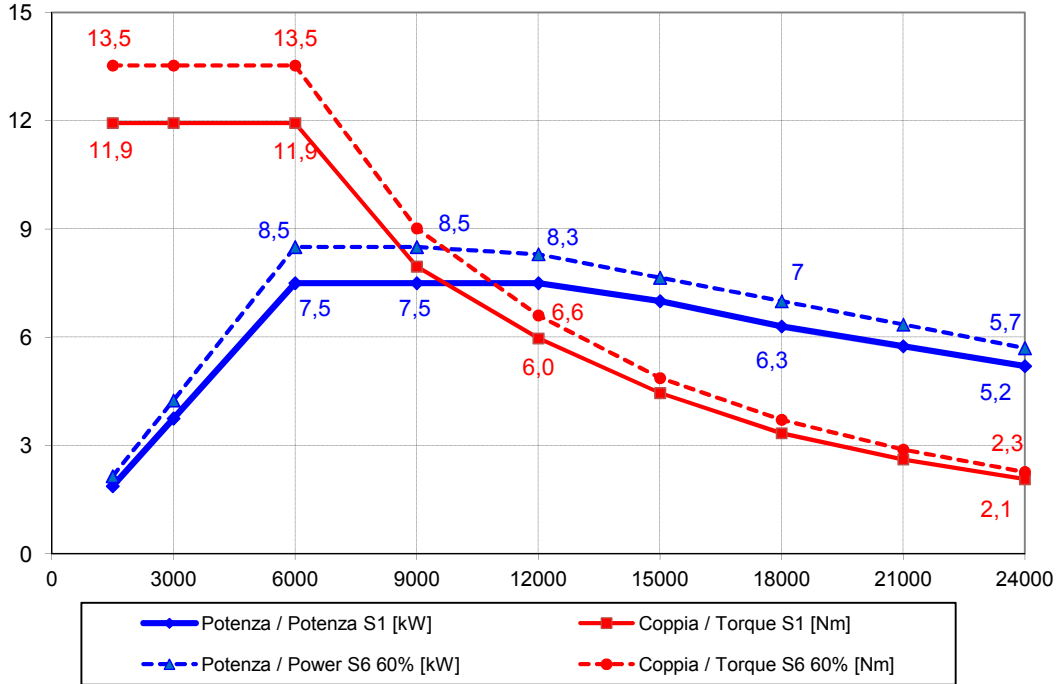

Specifiche tecniche / Technical specifications	
Potenza max. (serv. S1) / Max. Power.(S1 duty)	7.5 kW @ 6000 Rpm
Coppia max. (serv. S1) / Max. Torque (S1 duty)	11.9 Nm
Corrente (serv. S1) / Current (S1 duty)	19.5 A
Potenza max. (serv. S6 60%) / Max. Power.(S6 60% duty)	8.5 kW @ 6000 Rpm
Coppia max. (serv. S6 60%) / Max. Torque (S6 60% duty)	13.5 Nm
Corrente (serv. S6 60%) / Current (S6 60% duty)	21.5 A
Tensione / Voltage	380 V
Numero poli / Poles	4
Velocità rotazione max / Max Speed	24 000 Rpm
Rotazione / Rotation	CW - CCW
Azionamento / Supply	con inverter / by inverter
Attacco utensile / Tool interface	HSK 63F
Cuscinetti / Ball bearings	Ceramici obliqui ad alta velocità alta precisione / Ceramic high speed high precision angular contact ball bearings Ant./Front: coppia / pair Post./Rear: coppia / pair
Raffreddamento / cooling	Aria con elettroventola 24V DC Air by electrofan 24V DC
Sensoristica / Sensors	S1 Afferraggio utensile / Tool lock S2 Pinza aperta / Open clamp S3 Rotazione albero / Spindle rotation
Connessioni pneumatiche / Air inlets	Sblocco ut./Release. tool: E6 6-6.5 bar Pressurizz./Pressurization.: E4 6-6.5 bar Soffio cono/Taper clean.: E6 6-6.5 bar
Peso / Weight	24 Kg