

TH24

series



Product Segments

- **Care Motion**

Connected actuators

1~3

Maximum available buttons

6

Color


grey

Protection class


up to IP66

Drawing

Standard Dimension
(mm)

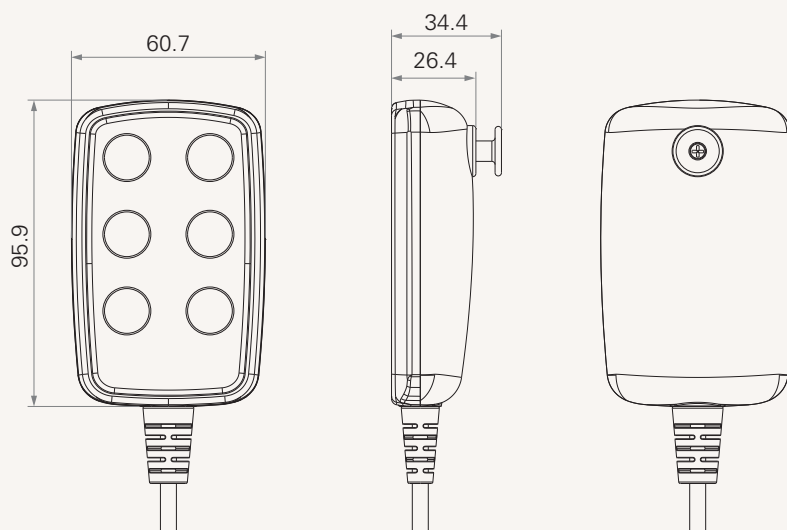

Dimension with Cable Length

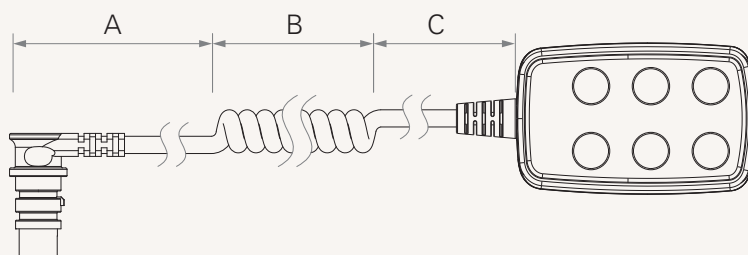

Cable Length (mm)

CODE	A	B	C
1	1000	300	200
2	1200	300	300
3	1400	300	400
4	2400	0	0
5	0	600	0
6	1000	200	200

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application.








Due to continuous development in order to improve our products, TiMOTION products are subject to frequent modifications and changes without prior notice.

TiMOTION reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by TiMOTION.

TH24 Ordering Key

TH24

Version: 20150202-D

	Number of Actuators	1 = 1	2 = 2	3 = 3
	Plug	1 = DIN 8pin, 90°, for TC2/TC3/TC7 2 = RJ 10pin, 90°, for TC1/TC8/TC10 4 = DIN 8pin, 180°, for extension cable		5 = RJ 10pin, 180°, for TC6/TC9/extension cable A = Customized
	Color	2 = Grey (Pantone 428C)		
	IP Rating	1 = Without	2 = IP54	3 = IP66
	Key Definition	01~27 = See appendix* Note : please contact TIMOTION before making an order		AA = Customized
				
	Cable Length	1~6 = See appendix		